

FEATURE


- **Installation:** Factory Install - Integral to Fixture
- **Control:** Hold time, High-Low setting, continuous Bi-level dimming, manual/auto - on/off
- **Sensor:** Dusk-to-Dawn Control



SPECIFICATIONS

| | |
|---------------------------|--------------------------------|
| SENSOR TYPE: | Twist-Lock 7-Pin Receptacle |
| INPUT VOLTAGE: | 0~480VAC |
| OPERATING TEMP: | -40°F ~ +158°F (-40°C ~ +70°C) |
| RATED FREQUENCY: | 50/60Hz |
| RATED LOADING: | 15Amp |
| LEAD: | 16AWG, 14AWG |
| SIGNAL CONTROL: | 0-30VDC, 250mA MAX |
| RELATIVE HUMIDITY: | 96% |
| WARRANTY: | 5 years |

DIMENSIONS

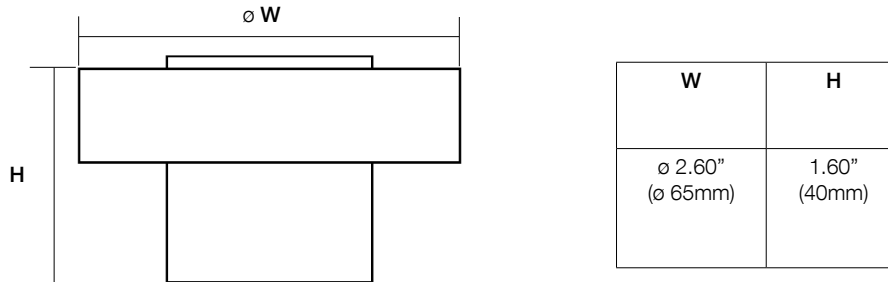

WIRING DIAGRAM

