

WFM SERIES FULL CUTOFF WALL PACK TILT-ABLE

Client:
 Project:
 Type:
 Quantity:

CONSTRUCTION

Low profile architectural style wall pack, sleek and modern design, die-cast aluminum housing provides excellent thermal management.
 Suitable for applications requiring 3G testing prescribed by ANSI C136.31.

OPTICS

Individual acrylic LED optics provide IES Type III distribution.
 Light engines available between 4000K, 5000K (70+ CRI)



ELECTRICAL

70+ CRI Lumileds LED.
 -40°C up to 40°C (-40°F up to 104°F) maximum operating temperature.
 >54,000 hr LED at L70.
 Driver operates at 120-277V input, 50/60Hz, <20% THD, 0.9 power factor, 1-10V dimmable.
 Optional 10kV surge protection.



SENSOR (OPTIONAL)

SENSOR-PH-PB-U Integral Button Style Photocell.

MOUNTING

Wall mount over electrical box or via surface conduit.
 0° to +90° tilt adjustment.

STANDARD FINISH

Corrosion resistant Dark Bronze powder coating finish.

CERTIFICATION

Wet Location Listed.
 Meets Buy America Act requirements.
 All luminaires are built to UL1598 standards and bear appropriate cULus labels.
 DLC® Premium (DesignLights Consortium Qualified) listed.

WARRANTY

5 year warranty, see Limited Warranty for additional information.

SHIPPING DATA

Product	Measurement	Weight
WFM-27	10"L x 8"W x 5"H	4 lb
WFM-40	10"L x 8"W x 5"H	4 lb
WFM-67	12"L x 11"W x 6"H	8 lb
WFM-80	12"L x 11"W x 6"H	8 lb



WFM SERIES FULL CUTOFF WALL PACK TILT-ABLE

ORDER INFORMATION					EXAMPLE: WFM 27 50 T3 DB U	
Fixture	Series	Power & LM	CCT	Finish	Input	
	WFM			DB	U	
Accessories Options						

A	SERIES					
	WFM	Full Cutoff Wall Pack Tilt-able				

B	POWER & LM				
	Code	Power	Lumen	LM/W	
	27	27W	3600lm	133	
	40	40W	5200lm	130	
	67	67W	8800lm	131	
	80	80W	10500lm	131	

C	CCT				
	40	4000K			
	50	5000K			

D	FINISH				
	DB	Dark Bronze			

E	INPUT				
	U	110-277V			

F	ACCESSORIES/OPTIONS				
	AIA	Assembled in America, compliant with BAA (COTS)			
	SENSOR-PH-PB-U*	Button Style Photocell			
	SURGE-LSP4-U / H	10kV inline Surge Protection for Universal input / U : 120-277V, H : 480V input			


*see page 5 for sensor spec

WFM SERIES FULL CUTOFF WALL PACK TILT-ABLE


DIMENSIONS

Model	L	W	D
WFM-27 / 40	9.31" (232mm)	7.29" (185mm)	4.20" (107mm)
WFM-67 / 80	11.02" (280mm)	10.06" (256mm)	5.09" (129mm)


Front

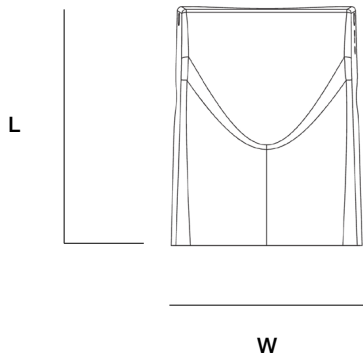

Side



Bottom



WFM SERIES FULL CUTOFF WALL PACK TILT-ABLE

PERFORMANCE DATA

SYSTEM WATTS	VOLTAGE	4000K		5000K	
		LUMENS	LPW	LUMENS	LPW
WFM-27	120-277V	3,600	133	3,600	133
WFM-40	120-277V	5,200	130	5,200	130
WFM-67	120-277V	8,800	131	8,800	131
WFM-80	120-277V	10,500	131	10,500	131

DLC CODE

Part Number	DLC Part Number	DLC Class
WFM - 27 - 40 - T3 - DB - U	OEM DLC: MWP1027W27V40K[D,B,W][Blank,P0]D[Blank,A-Z,a-z,0-9] Product ID: PLLGA20A	Premium
WFM - 27 - 50 - T3 - DB - U	OEM DLC: MWP1027W27V50K[D,B,W][Blank,P0]D[Blank,A-Z,a-z,0-9] Product ID: PZ3ORBRN	Premium
WFM - 40 - 40 - T3 - DB - U	OEM DLC: MWP1040W27V40K[D,B,W][Blank,P0]D[Blank,A-Z,a-z,0-9] Product ID: P73Z2I7B	Premium
WFM - 40 - 50 - T3 - DB - U	OEM DLC: MWP1040W27V50K[D,B,W][Blank,P0]D[Blank,A-Z,a-z,0-9] Product ID: PZD2MI1F	Premium
WFM - 67 - 40 - T3 - DB - U	OEM DLC: MWP1067W27V40K[D,B,W][Blank,P0]D[Blank,A-Z,a-z,0-9] Product ID: PB5BM14J	Premium
WFM - 67 - 50 - T3 - DB - U	OEM DLC: MWP1067W27V50K[D,B,W][Blank,P0]D[Blank,A-Z,a-z,0-9] Product ID: PUCVFQDV	Premium
WFM - 80 - 40 - T3 - DB - U	OEM DLC: MWP1080W27V40K[D,B,W][Blank,P0]D[Blank,A-Z,a-z,0-9] Product ID: PRSMLEOE	Premium
WFM - 80 - 50 - T3 - DB - U	OEM DLC: MWP1080W27V50K[D,B,W][Blank,P0]D[Blank,A-Z,a-z,0-9] Product ID: PXLO6URK	Premium

WFM SERIES FULL CUTOFF WALL PACK TILT-ABLE

SENSOR SPEC

Model	Type	Mounting	Coverage	Input	Function	Programmable
SENSOR-PH-PB-U	-	-	-	Universal	Dusk-to-Dawn Control	-



SENSOR-PH-PB-U